

## IES7120G Series

DIN-Rail Mounting

16/20-port Full Gigabit Layer 2 Managed Industrial Ethernet Switch

- Support 4 Gigabit fiber ports (SFP slots) optional, 16 Gigabit copper ports
- Adopt SW-Ring patent technology, support single ring, coupling ring, chain ring, Dual-homing ring network function, automatic recovery time of network failure < 20ms
- Support dual power supply input, input voltage: 12~48VDC
- Support -40~75°C wide operating temperature range



## Introduction

IES7120G series are 16/20-port full Gigabit layer 2 managed industrial Ethernet switches. This series of products provide Gigabit copper port and Gigabit SFP slot. It adopts DIN-Rail mounting to meet the requirements of different application scenes.

Network management system supports various network protocols and industrial standards, such as STP/RSTP/MSTP, 802.1Q VLAN, QoS, IGMP Static Multicast, LLDP, Port Trunking, Port Mirroring, etc. It also possesses complete management functions, including Port Configuration, Port Statistics, Access Control, 802.1X Authentication, Network Diagnosis, Rapid Configuration, Online Upgrading and so on, and supports CLI, WEB, Telnet, SNMP and other access methods. It can provide users with good experience with friendly design of network management system interface, simple and convenient operation.

Power supply input is two independent power supply circuits, which can ensure the device normal operation when one of the power supplies breaks down. Design of DIP switch can achieve the device rebooting and restore factory defaults. When power supply or port link failure occurs, ALARM indicator will be bright and send out alarm, meanwhile, alarm device connected to the relay will send out alarm for rapid scene troubleshooting. Hardware adopts fanless, low power consumption, wide temperature and voltage design and has passed rigorous industrial standard tests, which can suit for the industrial scene environment with harsh requirements for EMC. It can be widely used in smart grid, rail transit, smart city, safety city, new energy, aerospace, intelligent manufacturing, military project and other industrial fields.

## Features and Benefits


- ⊙ SNMPv1/v2c/v3 is used for network management of various levels
- ⊙ RMON can be used for efficient and flexible network monitoring
- ⊙ Port mirroring can conduct data analysis and monitoring, which is convenient for online debugging
- ⊙ QoS supports real-time traffic classification and priority setting
- ⊙ LLDP can achieve automatic topology discovery, which is convenient for visual management
- ⊙ DHCP server and client can be used for distributing IP address
- ⊙ File management is convenient for the device rapid configuration and online upgrading
- ⊙ Log management has recorded booting, operation and connection information
- ⊙ Bandwidth management can reasonably distribute network bandwidth, preventing unpredictable network status
- ⊙ Port statistics can be used for port real-time traffic statistics
- ⊙ User password can conduct user hierarchical management to improve the device management security
- ⊙ Anti-attack control, ACL and 802.1X authentication can enhance the network flexibility

and security

- ⦿ E-mail alarm is convenient for immediate fault discovery during remote management
- ⦿ Relay alarm is convenient for troubleshooting of construction site
- ⦿ Storm suppression can restrain the broadcast, unknown multicast and unknown unicast
- ⦿ SSHD configuration can achieve data transmission encryption, preventing DNS and IP spoofing
- ⦿ TELNET and HTTPS configuration can guarantee the data access security
- ⦿ VLAN is used for simplifying network planning
- ⦿ Port trunking and LACP can increase network bandwidth and enhance the reliability of network connection to achieve optimum bandwidth utilization
- ⦿ IGMP Snooping, GMRP and static multicast can be used for filtering multicast traffic to save the network bandwidth
- ⦿ Support Port Isolation in the same VLAN
- ⦿ SW-Ring and STP/RSTP/MSTP can achieve network redundancy, preventing network storm
- ⦿ Network Diagnosis and Troubleshooting can be conducted via Ping, Traceroute and Port Loopback

## Dimension

Unit:mm

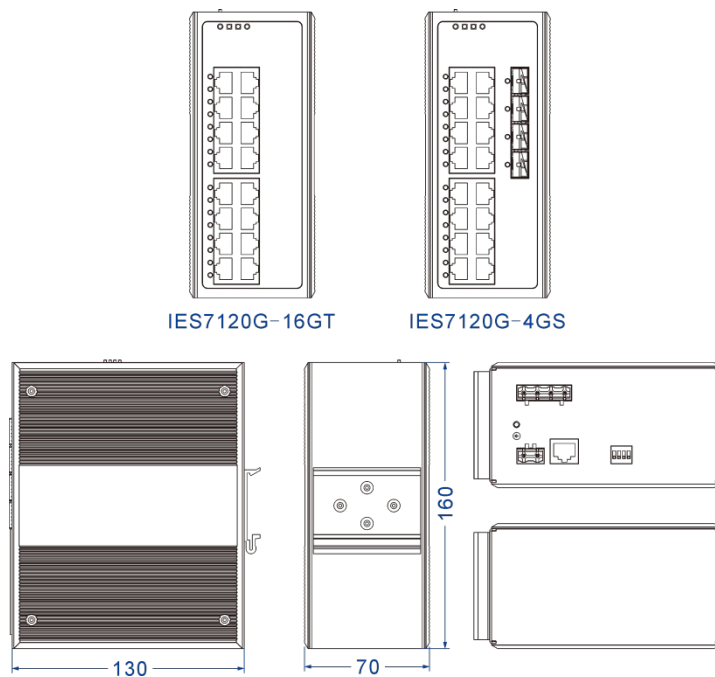

# Specification

Standard & Protocol	<p>IEEE 802.3 for 10Base-T                  IEEE 802.3u for 100Base-TX                  IEEE 802.3ab for 1000Base-T                  IEEE 802.3z for 1000Base-X                  IEEE 802.3x for Flow Control                  IEEE 802.1D for Spanning Tree Protocol                  IEEE 802.1w for Rapid Spanning Tree Protocol                  IEEE 802.1s for Multiple Spanning Tree Protocol                  IEEE 802.1Q for VLAN                  IEEE 802.1p for CoS                  IEEE 802.1X for 802.1X Authentication                  IEEE 802.1AB for LLDP                  IEEE 802.3ad for LACP</p>
Management	<p>SNMP v1/v2c/v3 Centralized Management of Equipment, RMON, Port Mirroring, QoS, LLDP, DHCP Server, DHCP Client, File Management, Log Management, Port Statistics</p>
Security	<p>Classification of User Permissions, Anti-attack Control, ACL, 802.1X Authentication, Port Alarm, Power Supply Alarm, E-mail Alarm, Storm Suppression, SSHD Configuration, Telnet Configuration, HTTPS Configuration</p>
Switch Function	<p>802.1Q Vlan, Static/Dynamic Port Aggregation, Bandwidth Management, Flow Control, Port Isolation</p>
Unicast / Multicast	<p>Static Multicast, GMRP, IGMP-Snooping</p>
Redundancy Protocol	<p>SW-Ring, STP/RSTP/MSTP</p>
Fault Diagnosis	<p>Ping, Traceroute, Port Loopback</p>
Time Management	<p>Sntp</p>
Interface	<p>Copper port: 10/100/1000Base-T(X), RJ45, Automatic Flow Control, Full/half Duplex Mode, MDI/MDI-X Autotuning                  SFP slot: 1000Base-SFP                  Console port: CLI command line management port (RS-232), RJ45                  Alarm port: 2-pin 7.62mm pitch terminal blocks, support 1 relay alarm output, current carrying capacity 1A@24VDC or 0.5A@120VAC</p>
LED Indicator	<p>Running Indicator, Port Indicator, Power Supply Indicator, Alarm Indicator</p>
Switch Property	<p>Transmission mode: store and forward</p>

	MAC address: 16K Packet buffer size: 12Mbit Backplane bandwidth: 56G Switch time delay: < 10μs									
Power Requirement	12~48VDC, 4-pin 7.62mm pitch terminal blocks dual power supply redundancy, reverse polarity protection, nonpolarity									
Power Consumption	<table border="1"> <thead> <tr> <th>Model</th> <th>No-load (@48VDC)</th> <th>Full-load (@48VDC)</th> </tr> </thead> <tbody> <tr> <td>IES7120G-4GS</td> <td>11.04W</td> <td>14.88W</td> </tr> <tr> <td>IES7120G-16GT</td> <td>11.04W</td> <td>13.68W</td> </tr> </tbody> </table>	Model	No-load (@48VDC)	Full-load (@48VDC)	IES7120G-4GS	11.04W	14.88W	IES7120G-16GT	11.04W	13.68W
Model	No-load (@48VDC)	Full-load (@48VDC)								
IES7120G-4GS	11.04W	14.88W								
IES7120G-16GT	11.04W	13.68W								
Environmental Limit	Operating temperature range: -40~75°C Storage temperature range: -40~85°C Relative humidity: 5% ~ 95% ( no condensation )									
Physical Characteristic	Housing: IP40 protection, metal Installation: DIN-Rail mounting Dimension (W x H x D): 70mm×160mm×130mm Weight: ≤1.08kg									
Industrial Standard	IEC 61000-4-2 (ESD), Level 3 IEC 61000-4-4 (EFT), Level 3 IEC 61000-4-5 (Surge), Level 3 Shock: IEC 60068-2-27 Free fall: IEC 60068-2-32 Vibration: IEC 60068-2-6									
Certification	CE, FCC, RoHS, UL61010									
Warranty	5 years									



## Ordering Information

Available Models	Gigabit SFP Slot	Gigabit Copper Port	Power Supply Range
IES7120G-4GS	4	16	12~48VDC
IES7120G-16GT	—	16	dual power supply



Address: 3/B, Zone 1, Baiwangxin High Technology Industrial Park, Song Bai Road, Nanshan District, Shenzhen, 518108, China

TEL.: +86-755-26702668 ext 835 FAX: +86-755-26703485

E-mail: [ics@3onedata.com](mailto:ics@3onedata.com)

Website: [www.3onedata.com](http://www.3onedata.com)

◀ [Please scan our QR code for more details](#)

\*Product pictures and technical data in this datasheet are only for reference. Updates are subject to change without prior notice. The final interpretation right is reserved by 3onedata.