



SWV61400 Series

Hi-Definition Analog Video

TVI/CVI/AHD to Fiber Converter

- Lossless non-compression real time transmission
- Automatically identify formats of input video: AHD/TVI/CVI/PAL/NTSC/SECAM
- Support 720P/25/30/50Hz, 960P/25/30Hz, 1080P/30Hz
- Advanced lightning protection design, support 5.7KV lightning protection
- Through LED indicators to inform its functional mode
- Industrial wide range of operational temperature
- Stand-alone or Rack-mounted, simple installation



Introduction

Our 4-Ch TVI/CVI/AHD TO Fiber Converters is universal type supporting High Definition Analog video format HD-TVI/HD-CVI/AHD, can simultaneously transmit 4 channels video and 1-ch RS485 over one core multimode or single-mode optical fiber. It also supports the regular analog video format such as PAL/NTSC/SECAM; it is a kind of universal fiber transmission solution/product for CCTV analog video/data signals. Devices are available for either standalone or rack-mount installation, which is suitable for different working environment. Electronic and optical adjustments are never required. LED indicators are provided for instantly monitoring system status.

Specification

<p>Optics</p>	<p>Wavelength: WDM: 1310nm/1550nm Output Power: -8~3dBm Optic fiber: 50/125u multimode, 62.5/125u multimode, 9/125u single mode Rx sensitivity: -23dBm Optical connector: FC, ST, SC (optional) Distance: 0~550M (MM)/0~80KM (SM) (Default distance is 20Km)</p>
<p>Video</p>	<p>Number of Channels: 4 Input/output impedance: 75 Ohm (unbalance) Standard video input/output voltage: 1.0Vp-p Video Bandwidth: 50MHz Sampling Bandwidth: 8bit Sampling Frequency: 100MHz Signal to noise ratio: >67dB Rise and Fall time: <0.8ns Optical Signal Intrinsic Jitter: <0.2 UI Differential Gain: < ±1.5% Differential Phase: < ±1° Connector: BNC</p> <p>Supporting video pixel: 1280(H)x720(V)@30Hz/1MPX 1280(H)x720(V)@50Hz/1MPX 1280(H)x960(V)@30Hz/1.3MPX 1920(H)x1080(V)@30Hz/2MPX</p>
<p>Data</p>	<p>Protocol: Default: RS485 (RS232/RS422 Optional) Number of channels: 1 Connector: 9pins Terminal Blocks Data Rate: 0-200Kbps</p>

	Directions: Default: Simplex from Rx to Tx (BIDI duplex optional)
Mechanical Structure & Environment	Power: DC5V 2A Power Consumption: ≤6W Working Temperature: -15°C~65°C Storage Temperature: -40°C ~85°C Relative Humidity: 5%~95% (no condensation) MTBF: ≥ 100000Hours

Ordering Information


Model Number	Product Configuration	Remark	Fiber Mode	Wavelengths	Transmission Distance
SWV61400	4Ch Forward AHD Video 1080P	FC/SC/ST	Single-mode	1310 nm	20Km
SWV61401	4Ch Forward AHD Video 1080P +1Ch Reverse Data	FC/SC/ST	Single-mode	WDM: 1310/1550 nm	20Km

Options	
1	standard definition/720P/1080P
2	1A ↓ 1 reverse audio
3	1A ↑ ↓ 1 bi-directional audio
4	1D ↑ 1 positive data (RS-485/422/232)
5	1D ↓ 1 reverse data (RS-485/422/232)
6	I/O 1 I/O
7	FXS/FXO 1 FXS/FXO
8	Ethernet 1 Ethernet
9	2U 16" rack, redundant power
10	4U 18" rack, redundant power

Packing information

Dimensions of products (Pcs per Tx or Rx)					
Module name	Configuration	Long (mm)	Wide(mm)	High(mm)	Volume(mm ³)
SWV61400	4-Ch video 1080P	174	173	30	903060
SWV61401	4-Ch video 1080P + 1-Ch RS485 data	174	173	30	903060
Shipping weight (pair/Tx+Rx & power adaptors & packages)					
Module name	Configuration	weight (kg)		Package type	
SWV61400	4-Ch video 1080P	1.6		Carton box	
SWV61401	4-Ch video 1080P + 1-Ch RS485 data	1.65		Carton box	

Typical Application

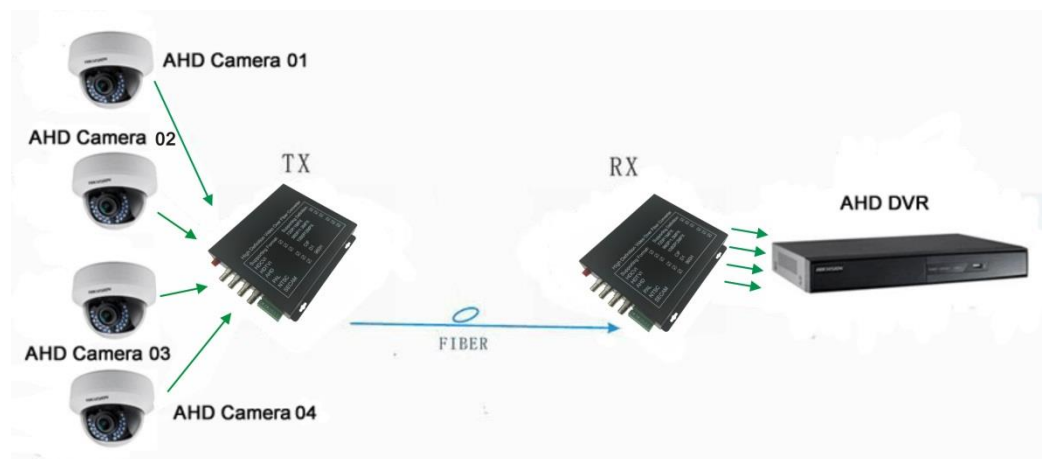

Remark

- Optical transmission distance is limited to optical loss of the fiber and any additional loss introduced by connectors, splices and patch panels
- Maximum transmission distance is also limited by fiber bandwidth
- Power adapter for stand-alone units is manufactured by third party. Power adapter included US, European, UK or Australian power plug
- Please feel free to contact factory for any special requirement and customization



Address: 3/B, Zone 1, Baiwangxin High Technology Industrial Park, Song Bai Road, Nanshan District, Shenzhen, 518108, China

TEL.: +86-755-26702668 ext 835 FAX: +86-755-26703485

E-mail: ics@3onedata.com

Website: www.3onedata.com



Please scan our QR code for more details

*Product pictures and technical data in this datasheet are only for reference. Updates are subject to change without prior notice. The final interpretation right is reserved by 3onedata.